


- RoHS Compliant.
- Surface Mount Device.
- Storage temperature: -40°C to +125°C.
- Operating temperature range: -40°C to +125°C (Including self temperature rise).


Electrical Specifications @25°C								
Part Number	OCL(uH MIN.) @100KHz,1V	OCL(uH MIN.) @100KHz,1V	OCL(uH MIN.) @100KHz,1V	DCR (mΩ max)			Hi-pot	I _{rms} (A)
	1-2	3-4	5-6	1-2	3-4	5-6	WDG-WDG	
CMB8020DG221U	360	360	360	0.6	0.6	0.6	2000VDC 1mA,60S	81

● The temperature rise current (I_{rms}) is the current that caused a approx 40°C temperature rise from 25°C ambient.

MECHANICAL DIMENSIONS (Unit:mm)

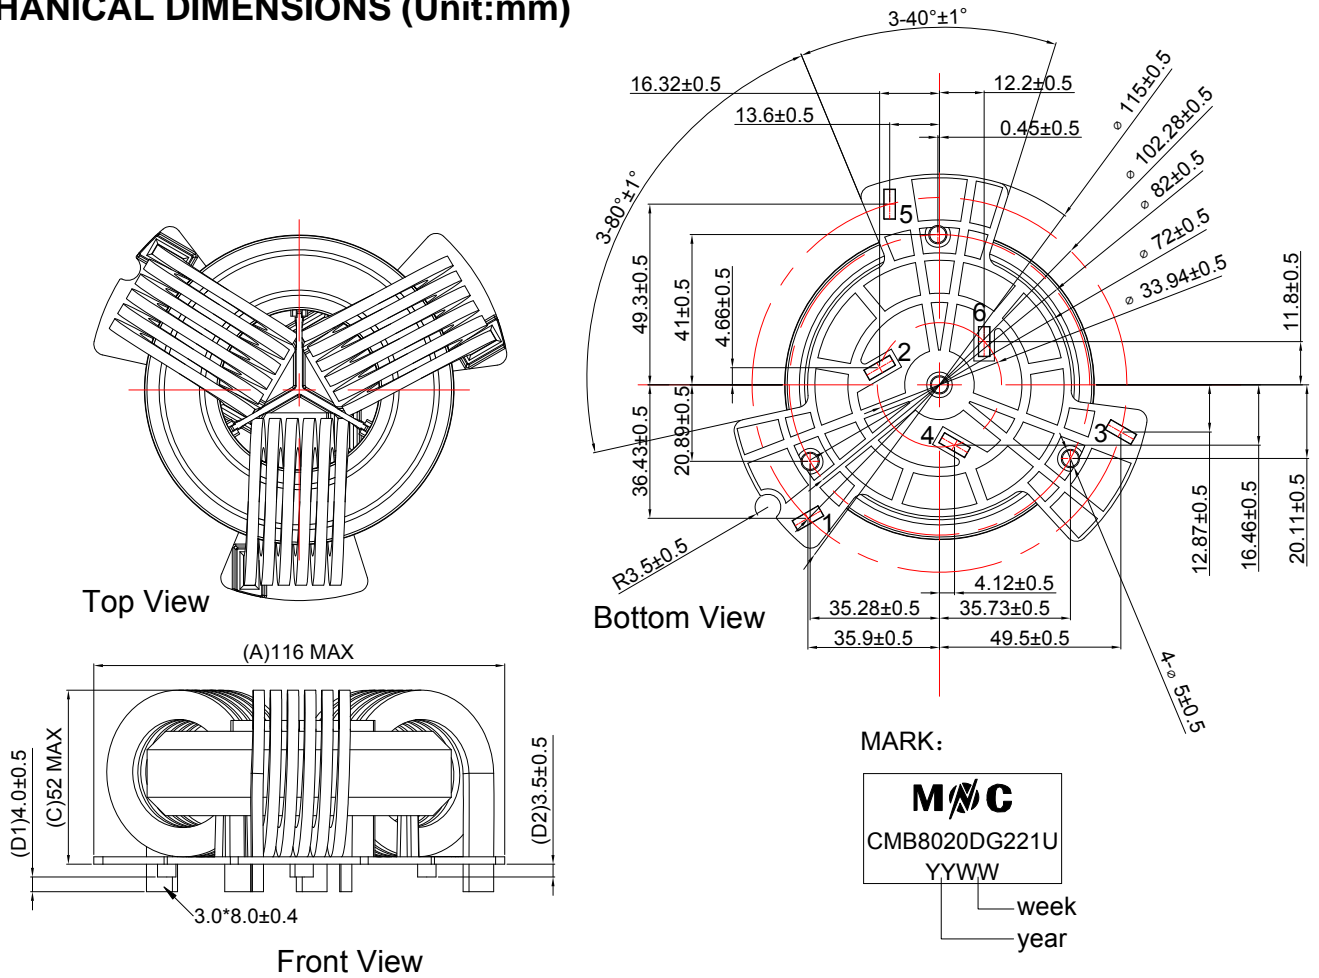

SCHEMATICS



● Start Winding