


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.




Electrical Specifications @25 °C								
Part Number	Turns Ratio(±3%)	OCL(uH±10%) @200KHz,0.1V	LK(uH max) @100KHz,0.1V	DCR (mΩ max)				HI-POT (Vrms)
	3-4:5-6:7-8:2-1	3-4	3-4 (short other pins)	3-4	2-1	5-6	7-8	pin (2,3-6,7)
EP-536SG	1:0.262:0.524:0.786	L _{0A} =155 L _{0.65A} ≥85%(L _{0A})	3.6	300	1600	25	600	1500

SCHEMATICS

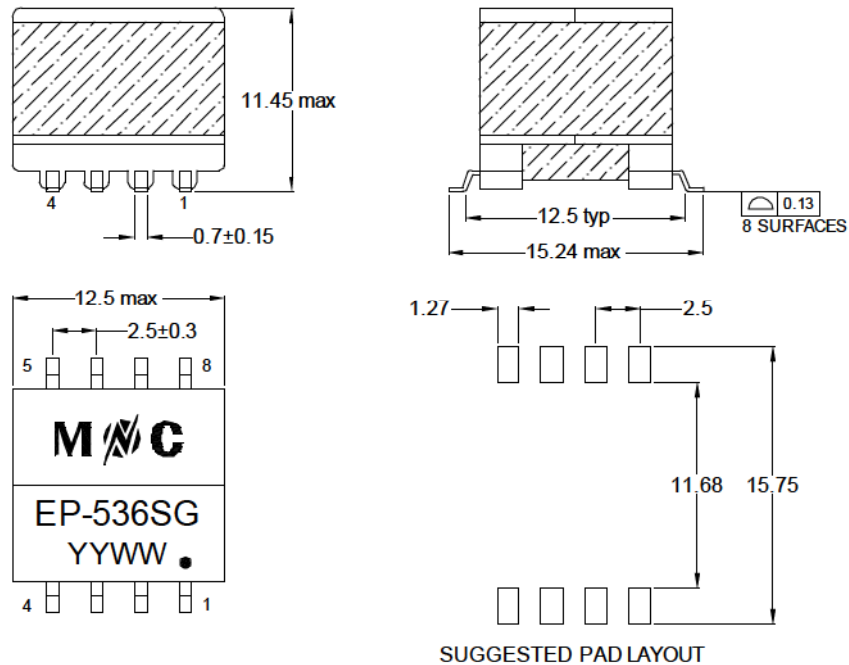

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

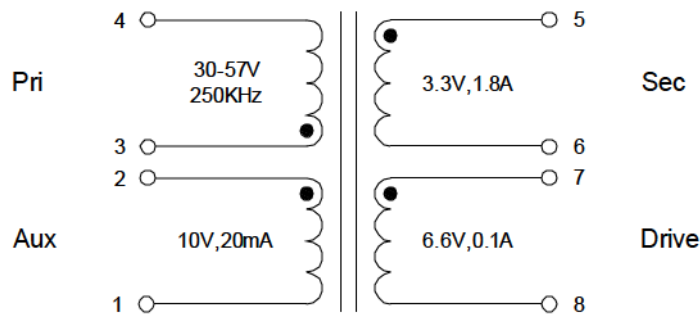

Tape&Reel Weight 250pcs per reel
3.25g/pcs