


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.




Electrical Specifications @25 °C							
Part Number	Turns Ratio(±3%)		OCL(uH±10%) @10KHz,0.1V	LK(uH max) @100KHz,0.1V	DCR (mΩ max)		HI-POT (Vrms)
	1-2:2-3	1-3:6-4	1-3	1-3 (short pin4+6)	1-3	6-4	Pri-Sec
EP-581SG	1:1	1:0.119	L _{0A} =300 L _{0.45A} ≥80%(L _{0A})	4.0	890	13	1500

SCHEMATICS

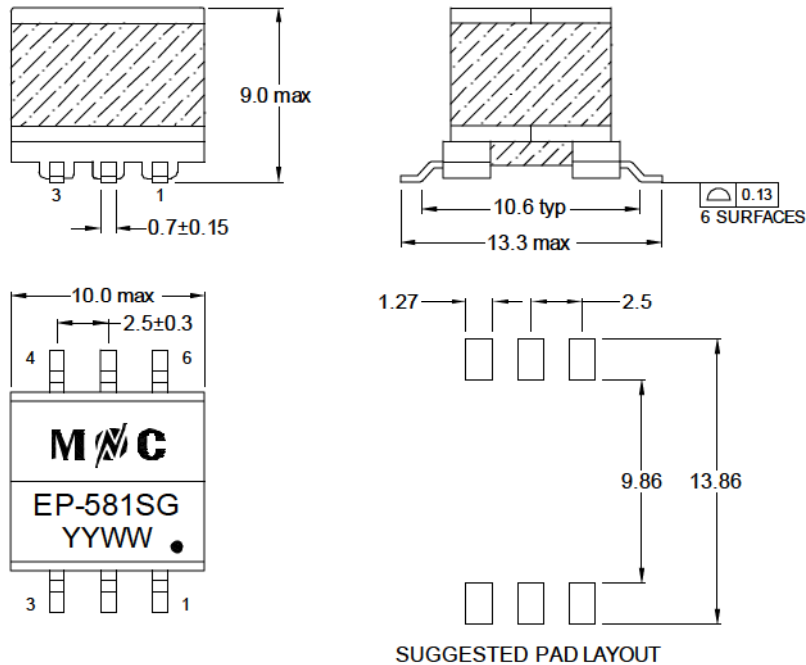

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

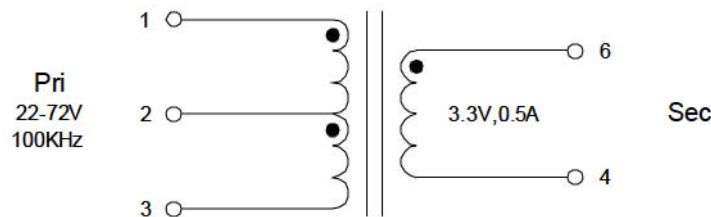

Tape&Reel Weigh 350pcs per reel
2.01g/pcs