


- POWER LINE COMMUNICATION TRANSFORMER
- OPERATING TEMPERATURE RANGE: 0°C TO 70°C
- STORAGE TEMPERATURE RANGE: -40°C TO +85°C
- ROHS COMPLIANT



Electrical Specifications @25°C					
Part Number	Turns Ratio	OCL (@2MHz,0.1V)	Insertion Loss	Frequency Range	Hi-pot
		Pri:Sec/1-3:4-6	1-3=4-6	2-68 MHz	MHz
RFT-006DG	1:1±5%	12.5-30.0uH	3.0dB Max	2-68	

MECHANICAL

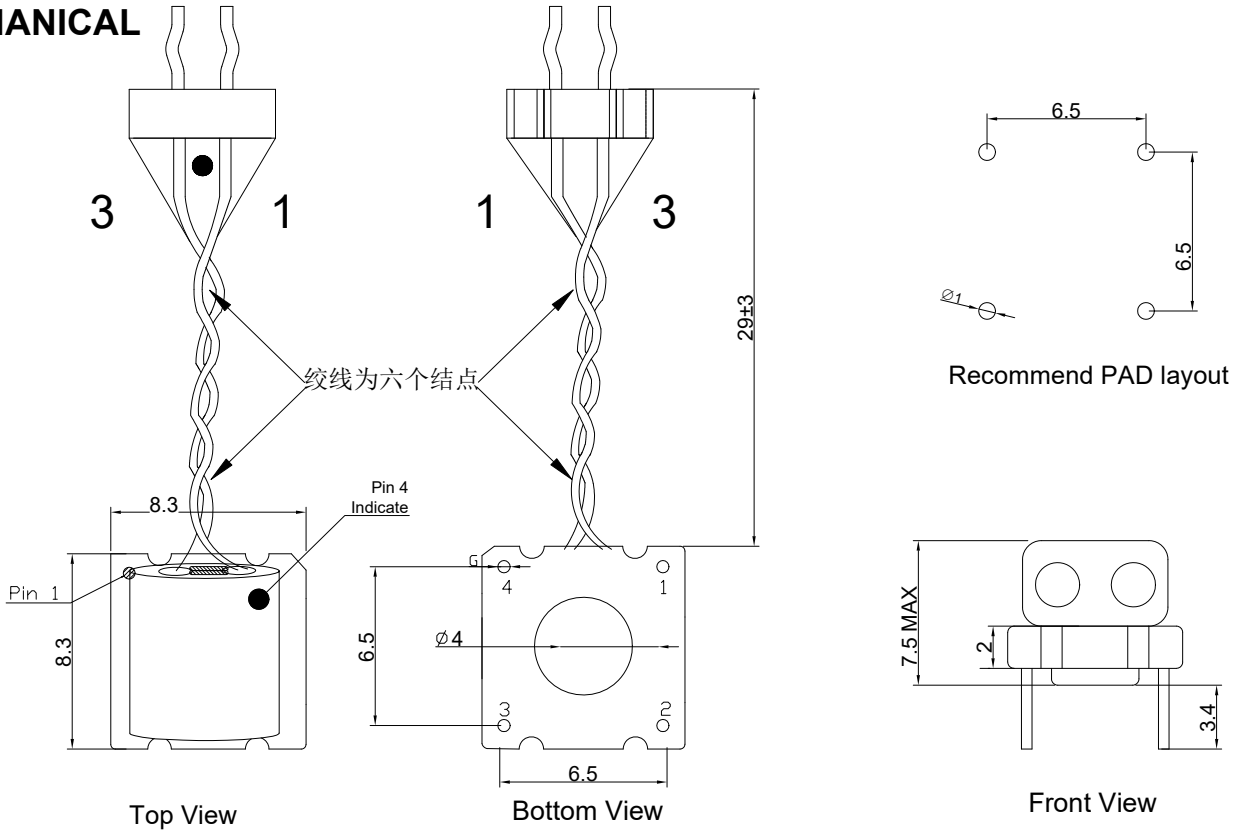

SCHEMATICS

